

AZURI DC INVERTER

ZIDNI KLIMA UREĐAJI

SUPRA

STANDARDNO UKLJUČENO

- Wifi sučelje
- Led display
- Automatski rad
- Automatsko pokretanje
- Inteligentno odmrzavanje
- Samodijagnoza
- Filter za pročišćivanje zraka
- Cold plasma (ionizator)
- I-Feel funkcija
- Low Ambient KIT
- Ugodan noćni način rada
- Tihi rad

MODEL	UČINAK (W)		ENER. KLASA SEER / SCOP	DIMENZIJE V / Š / D (mm)
	HLADENJE	GRIJANJE		
AZI-WO35VF/I	3500	3670	7,0 / 4,0 A++ / A+	294 / 889 / 212
AZI-WO35VF/O	(700-4000)	(800-4500)		596 / 848 / 320
AZI-WO50VF/I	5200	5300	7,0 / 4,0 A++ / A+	307 / 1013 / 221
AZI-WO50VF/O	(1260-6600)	(1120-6800)		700 / 963 / 396


-22°C ~ 24°C

-15°C ~ 43°C



CJEVOVOD	UČINAK (kW)	
	3,5	5,2
Max. visinska razlika [m]	10	10
Max. duljina instalacije [m]	20	25
Promjer cijevi tekuće faze [mm]	6,35	6,35
Promjer cijevi plinovite faze [mm]	9,52	12,7




MODEL	UČINAK (W)		ENER. KLASA SEER / SCOP	DIMENZIJE V / Š / D (mm)
	HLADENJE	GRIJANJE		
AZI-WE25VE/I	2500	2800	6,1/4,0 (A++/A+)	250/773/185
AZI-WE25VE/O	(500-3350)	(500-3500)		540/776/320
AZI-WE35VE/I	3200	3400	6,1/4,0 (A++/A+)	250/773/185
AZI-WE35VE/O	(600-3600)	(600-4400)		596/842/320
AZI-WE50VE/I	4600	5200	6,1/4,0 (A++/A+)	300/970/225
AZI-WE50VE/O	(650-5200)	(700-5400)		596/842/320
AZI-WE70VE/I	6155	6448	6,1/4,0 (A++/A+)	300/970/225
AZI-WE70VE/O	(1800-6400)	(1600-6600)		700/955/396

CJEVOVOD	UČINAK (kW)			
	2,5	3,2	4,6	6,15
Max. visinska razlika [m]	10	10	10	10
Max. duljina instalacije [m]	15	20	20	25
Promjer cijevi tekuće faze [mm]	6,35	6,35	6,35	6,35
Promjer cijevi plinovite faze [mm]	9,52	9,52	9,52	15,88


-15°C ~ 24°C

-15°C ~ 43°C

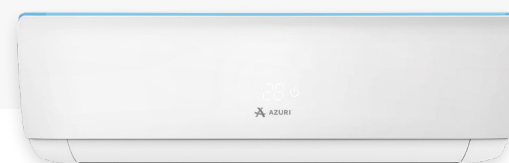

NORA

STANDARDNO UKLJUČENO

- WiFi sučelje
- Automatski rad
- Samodijagnoza
- Inteligentno odmrzavanje
- Inteligentno predzagrijavanje
- I-Feel funkcija
- Ugodan noćni način rada
- Odvlaživanje