



ECO
ECO



Hisense Eco zidna jedinica s novom R-32 radnom tvari. Energetska učinkovitost **A++** u hlađenju.

Hisense



UEFA
EURO2020

OFFICIAL AIR CONDITIONER OF UEFA EURO 2020™

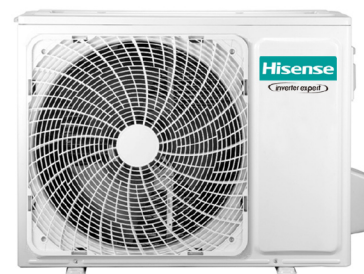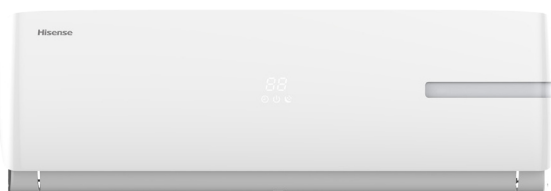

Važnije značajke



R32 radna tvar



19 dB(A)



Zaštita od smrzavanja



I feel funkcija



Super hlađenje



Grijanje na -15°C



Smart funkcija



Sleep funkcija



LED display



Jednostavna ugradnja

TEHNIČKE KARAKTERISTIKE

		DL25YD01	DL35YD01	DL50XA0A	DL70BB0B
SEER	Hlađenje	6,1	6,1	6,1	6,3
SCOP	Grijanje prosjek	4,0	4,0	4,0	4,0
Energetska klasa	Hlađenje	A++	A++	A++	A++
Energetska klasa	Grijanje prosjek	A+	A+	A+	A+
Kapacitet hlađenja (W)		2600(1000-3000)	3400(1000-4000)	5000(1000-6000)	7000(2500-8000)
Kapacitet grijanja (W)		2700(1000-3000)	3900(1000-4200)	5600(1600-6250)	7100(2500-8500)
Radna tvar		R32	R32	R32	R32
Razina buke vanjske jedinice dB (A)		47/54	47/54	47/53	48/56
Razina buke unutarnje jedinice dB (A)		39/38/36/34/31/28	39/38/36/34/31/28	46/44/42/40/38/33	48/45/43/40/39/35
Napajanje					
Napon/frekvencija/faza		220-240V~,50Hz,1P	220-240V~,50Hz,1P	220-240V~,50Hz,1P	220-240V~,50Hz,1P
Promjer cijevi za spajanje					
Cijev za tekuću fazu (inch) / (mm)		1/4 / 6.35	1/4 / 6.35	1/4 / 6.35	3/8 / 9.52
Cijev za plinsku fazu (inch) / (mm)		3/8 / 9.52	3/8 / 9.52	1/2 / 12.70	5/8 / 15.87
Netto dimenzija ŠxVxD (mm)	Unutarnja jedinica	765x275x213	765x275x213	934x315x228	1100x315x228
	Vanjska jedinica	660x483x240	660x483x240	815x585x280	860x667x310
Operativni raspon temperature (°C)	Grijanje	-15°C / 24°C	-15°C / 24°C	-15°C / 24°C	-15°C / 24°C
	Hlađenje	-15°C / 43°C	-15°C / 43°C	-15°C / 43°C	-15°C / 43°C
Maksimalna duljina cijevi (m)		15	15	15	15
Maksimalna visinska razlika (m)		5	5	5	5
Dodatna količina radne tvari (g/m)		20	20	20	30
Razmak između nogica (mm)		438	438	510	542